



The Power of Being There



## Technical Specifications

# Avocent SwitchView MP

### The Small, Inexpensive, Multi-Platform,


The SwitchView MP allows you to control up to 4 PC, Sun or USB computers with one keyboard, monitor and mouse. This compact, four-port switch provides connectivity to Intel-based, SUN and USB machines, without the need for expensive adapters or converters. SwitchView MP's mouse translation capability means users can work with a PS/2 or Sun mouse to connect to Sun workstations, USB computers, IBM PC/AT or PS/2 systems.

### Features:

- Supports any combination of PS/2, Sun or USB computers
- Supports Plug and Play video and is compliant with the VESA DDC2B standard
- User mouse will work with any attached computer-regardless of whether the computer is Sun, USB, Serial or PS/2 mouse
- "Keep Alive" feature allows attached servers to power the unit in the event of a Switch View MP Power Failure
- The AutoBoot feature boots all attached servers during initial power-up or after a power failure
- A built-in scanning feature allows you to automatically monitor, or scan, connected computers without intervention
- Simple Installation, no software or DIP switch settings
- Push button and hot key selection
- Linux, Microsoft, Novell and Solaris Certified

### SPECIFICATIONS

Dimensions	Height: 1.9" (4.83 cm) Width: 8.1"(20.57cm) Depth: 5.0"(12.7 cm) Weight: 0.96 lbs (0.43 kg)																
Environment/Power																	
Operating Temperature	41° (5°C) to 104° (40°C)																
Storage Temperature	-4° (-20°C) to 122° (50°C)																
Operating Voltage	100-240 VAC																
Power Frequency	50-60 Hz																
Power Supply	External power supply is required - 5V DC																
Supported Hardware	Computer: Sun workstations, USB, IBM PC/AT, PS/2 computers and 100 % compatibles																
Video Modes	VGA, SVGA, (XGA, XGA-II with adaptor) Maximum Resolution 1600 x 1200 @ 85 Hz																
Peripherals	PS/2 Keyboard, PS/2 mouse, Microsoft Explorer mouse, Microsoft Intelli Mouse Family, IBM Scrollpoint, Logitech Mouseman Wheel, Logitech Trackman Marble wheel, Logitech Marble FX, Kensington 4 button mouse, Sun Type 5 and Type 6																
Approved Agency	UL1950, CSA C22.2 No. 950, EN60950, IEC 950, FCC Part 15A, EN55022, EN50082																
Ordering Information																	
SwitchView MP unit	14085-EU																
Cable Assemblies	<table border="0"> <tr> <td>CIFCA-X</td> <td>(PS/2 only/VGA)</td> </tr> <tr> <td>CWSN - X</td> <td>SUN Keyboard/Mouse 13W3)</td> </tr> <tr> <td>CVSN - X</td> <td>(SUN Keyboard/Mouse VGA)</td> </tr> <tr> <td>CUFC - X</td> <td>(Universal PS/2, AT, Serial,VGA)</td> </tr> <tr> <td>CUSB - X</td> <td>(USB/VGA)</td> </tr> <tr> <td>CIFCA, CWSN, CVSN</td> <td>available in 4, 8, 15 foot</td> </tr> <tr> <td>CUSB</td> <td>available in 4, 8, 12 Foot</td> </tr> <tr> <td>CUFC</td> <td>available in 6, 8, 15 foot</td> </tr> </table>	CIFCA-X	(PS/2 only/VGA)	CWSN - X	SUN Keyboard/Mouse 13W3)	CVSN - X	(SUN Keyboard/Mouse VGA)	CUFC - X	(Universal PS/2, AT, Serial,VGA)	CUSB - X	(USB/VGA)	CIFCA, CWSN, CVSN	available in 4, 8, 15 foot	CUSB	available in 4, 8, 12 Foot	CUFC	available in 6, 8, 15 foot
CIFCA-X	(PS/2 only/VGA)																
CWSN - X	SUN Keyboard/Mouse 13W3)																
CVSN - X	(SUN Keyboard/Mouse VGA)																
CUFC - X	(Universal PS/2, AT, Serial,VGA)																
CUSB - X	(USB/VGA)																
CIFCA, CWSN, CVSN	available in 4, 8, 15 foot																
CUSB	available in 4, 8, 12 Foot																
CUFC	available in 6, 8, 15 foot																

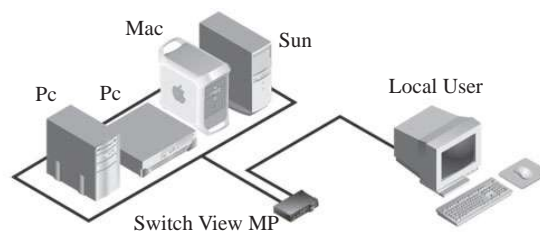

EDP Europe Limited  
43 Redhills Road  
South Woodham Ferrers  
Chelmsford  
Essex, CM3 5UL  
Tel: 00 44 1245 322380  
Fax: 00 44 1245 323484  
www.edpeurope.com