

# 23" BLANKING PANEL SHEETS

## BLANKING PANEL SOLUTION FOR 23" WIDE TELCO RACKS

Best practice in the data centre requires that unused U space is sealed to prevent hot exhaust air from finding its way to the air intake area at the front of the cabinet.


The PlenaFill® blanking solution is now available to prevent this recirculation in 23" Telco racks.

### Features & Benefits

- Panels are perforated for easy separation.
- No cage nuts or assembly required.
- No air gaps between U's.
- No Particulates.
- Quick installation saves time and money.
- Inert / <.01% Non-Hygroscopic / WEEE compliant.
- UL-VO 94 Electrical Insulating material.


#### P/N: 49-PF-12U-23

Fits 23" EIA Compliant Mounting Rails  
Qty: 12 x 23" 12U Scalable Blanking Panels  
Panel Size: 532mm(H) x 592mm(W) x 1mm

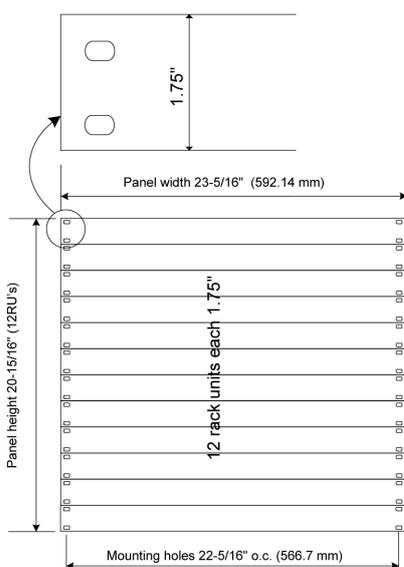


UL-VO Electrical Insulating material  
U's are perforated for easy separation  
Minimal packaging / Less storage / Less freight

## PRODUCT OVERVIEW

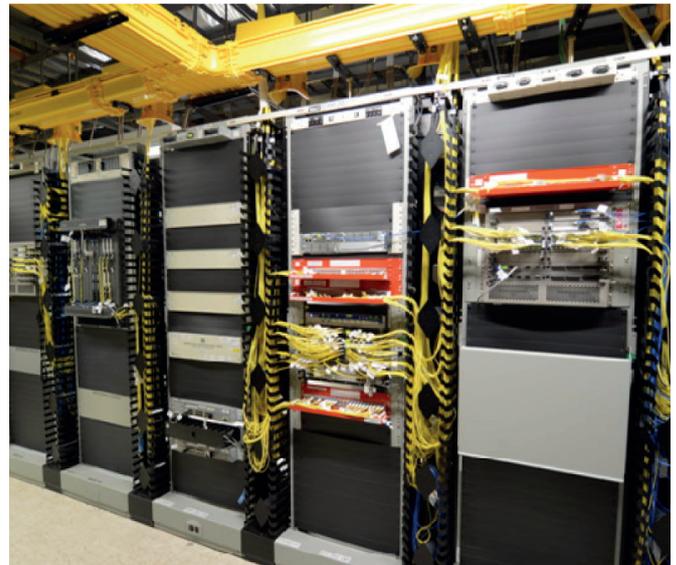

#### P/N: 49-PF-1-23

Fits 23" 1" o.c. Mounting Rails  
Qty: 12 x 23" Scalable Blanking Panels  
Panel Size: 529mm(H) x 592mm(W) x 1mm

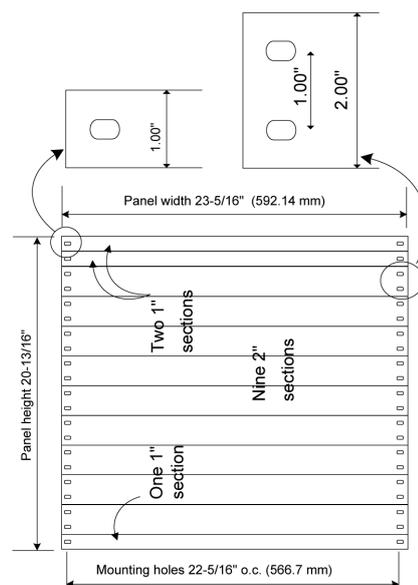

Inert / <.01% Non-Hygroscopic / WEEE Comp  
No air gaps between U's / No assembly required  
Quick installation saves time and money



**BEFORE**



**AFTER**

## Accessories



### **Black Square Hole Snap Rivet (Pack of 50)**

**Part No.: 49-PF-BR**

- For square hole EIA mounting rails.
- 9.5mm x 9.5mm holes.
- Rail thickness tolerance of 2.4mm to 2.6mm.



### **Round Hole Screw Rivet (Pack of 50)**

**Part No.: 49-PF-RR**

- For round hole EIA mounting rails.
- 5.9mm to 7.1mm diameter.



### **10/32 x 3/8" Thumb Screw (Pack of 50)**

**Part No.: 49-PF-TR**

- For 10/32 cage nuts or threaded rails.



**Screw Rivet X Head Screwdriver**  
49-PF-111-4



**PlenaTool Rivet Remover**  
49-PF-PT



**PlenaPop Hole Puncher**  
49-PF-PP



**23" Panel Chad Remover**  
49-PF-23-Punch